


Narrow Gap TIG

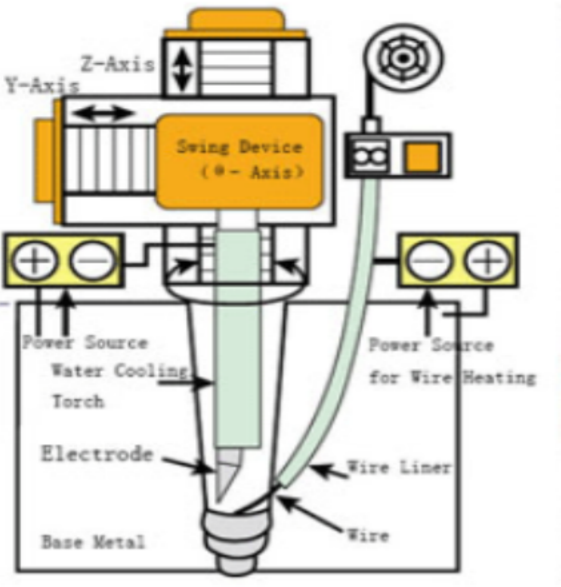

Features

- > Unique electrode oscillation to guarantee side wall penetration and increase weld efficiency.
- > High quality welding.
- > High efficiency welding.
- > Low heat input welding.
- > 3-directional AVC tracking, automatic operation.

Specification	
Max. weld thickness	150mm (Horizontal), 600mm(flat)
Groove width	9-16mm
Deposition speed	35~60g/min
Weld speed	50-300mm/min
Pass No. per layer	One pass
Wire diameter	1.2
Wire oscillating frequency	0.2~6.8m/min